

SX2000

4 Ω -2X 900W
8 Ω -2X600W
DAMPING=600
WEIGHT=21kg



📞 9406324199

🌐 sharpaudio123@gmail.com

SX3000



- 8 Ω -800W
- 4 Ω -1200W
- 2 Ω -1400W
- DAMPING=600
- WEIGHT=26KG



CLASS H

9406324199

sharppaudio123@gmail.com

SX4000

- 8 Ω -2X1000W
- 4 Ω -2X1400W
- 2 Ω -2X1700W
- DAMPING=600
- WEIGHT=28KG



 9406324199

 sharpaudio123@gmail.com

SX7000



8Ω-2x1500W
4Ω-2x2450W
2Ω-2x3200W
DAMPING=1500
WEIGHT=42KG



 **9406324199**

 **sharpaudio123@gmail.com**

SM-8000



8 Ω -2X1450W
4 Ω -2X2150W
2 Ω -2X2700
DAMPING=900
WEIGHT=42KG



 **9406324199**

 **sharpaudio123@gmail.com**



SM-9000

8Ω -2X1800W

4Ω -2X2800W

2Ω -2X3500W

DAMPING=1300

WEIGHT=48KG



 **9406324199**

 **sharppaudio123@gmail.com**

SM10002



8 Ω -2X2600w

4 Ω -2X4000w

2 Ω -2X5000w

CLASS=TD

DAMPING=2000

WEIGHT=50kg



📞 9406324199

🌐 sharpaudio123@gmail.com

SM-12002



8 Ω = 2x3200w
4 Ω = 2x5000w
2 Ω = 2x6000w
DAMPING=2000
CLASS=TD
WEIGHT=55kg



 9406324199

 sharpaudio123@gmail.com

CLASS H SM-4000



$8\Omega = 4 \times 600W$

$4\Omega = 4 \times 800W$

DAMPING=1000

WEIGHT=25KG



📞 9406324199

🌐 sharpaudio123@gmail.com

CLASS H SM-6000

8 Ω =4X800W

4 Ω =4X1200

DAMPING=1000

WEIGHT=27KG



☎ 9406324199

🌐 sharppaudio123@gmail.com

SM8004

8 Ω -4X1000W

4 Ω -4X1500W

DAMPING=1000

WEIGHT=29KG



 **9406324199**

 **sharpradio123@gmail.com**

8SW200



SPECIFICATIONS,

1. NOMINAL DIAMETER 8"
2. NOMINAL IMPEDANCE 16Ω
3. POWER RATING .350W RMS
4. SENSITIVITY [1W/1M] 99dB
5. FREQUENCY RANGE 60Hz~3KHz
6. VOICE COIL DIAMETER-2.5" COIL
7. MAGNET MATERIAL FERRITE



9406324199



sharpaudio123@gmail.com

10X351



MAGNET



SPECIFICATIONS:

- NOMINAL DIAMETER; 10"
- NOMINAL IMPEDANCE-8Ω
- RATING POWER-600W RMS
- SENSITIVITY; 96
- FREQUENCY;
- VOICE COIL DIAMETER-3.4"



9406324199



sharppaudio123@gmail.com

MODEL :- ST 10FW 500



SPECIFICATIONS :-

- NOMINAL DIAMETER 10"
- NOMINAL IMPEDANCE 16Ω
- POWER RATING -400W RMS
- SENSITIVITY[1W/1M] 95dB
- FREQUENCY RANGE 50~4KHz
- VOICE COIL DIAMETER-3"/75MM



MAGNET -FERRITE



9406324199



sharppaudio123@gmail.com



12FW250-A



SPECIFICATIONS;

- NOMINAL DIAMETER; 12"
- NOMINAL IMPEDANCE-8 Ω
- POWER RATING-250W RMS
 - SENSITIVITY-96dB
- FREQUENCY-55~9KHz
- VOICE COIL MAGNET-49MM/2"

MAGNET

📞 9406324199 🌐 sharppaudio123@gmail.com



12FW250



SPECIFICATIONS;

NOMINAL DIAMETER-12"
NOMINAL IMPEDANCE-8 Ω
POWER RATING-250W RMS



sensitivity [1w/1m]-96dB

FREQUENCY RANGE-55Hz~9KHz

VOICE COIL DIAMETER-2"

MAGNET MATERIAL FERRITE



9406324199



sharppaudio123@gmail.com

12 FW76



SPECIFICATIONS;

- NOMINAL DIAMETER-12"
- NOMINAL IMPEDANCE-8Ω
- POWER RATING -450W RMS

- SENSITIVITY [1W/1M]-98dB
- FREQUENCY RANGE-55Hz~3KHz
- VOICE COIL DIAMETER-3"/76MM

 **9406324199**

 **sharpaudio123@gmail.com**



MB12X351

SPECIFICATIONS;

- NOMINAL DIAMETER-12"
- NOMINAL IMPEDANCE-8Ω
- POWER RATING -700W RMS
- SENSITIVITY[1W/1M]-97.8dB
- FREQUENCY RANGE-63Hz~3KHz
- VOICE DIAMETER-3.5"/86MM



MAGNET MATERIAL FERRITE



9406324199



sharppaudio123@gmail.com



12FW800

SPECIFICATIONS:

NOMINAL DIAMETER 12"
NOMINAL IMPEDANCE 8Ω
POWER RATING 800W RMS
SENSITIVITY[1W/1M]95dB
FREQUENCY RANGE-52~1KHz
VOICE COIL DIAMETER-4"
MAGNET MATERIAL FERRITE



9406324199



sharppaudio123@gmail.com



12NDL88



SPECIFICATIONS

- NOMINAL DIAMETER-12"
- NOMINAL IMPEDANCE-8 Ω
- POWER RATING-700W RMS
- SENSITIVITY [1W/1M]-97.5dB
- FREQUENCY RANGE-50Hz~3KHz
- VOICE VOIL DIAMETER-3.5"/86MM
- MAGNET MATERIAL NEO

 9406324199

 sharppaudio123@gmail.com

MODEL -; 12X351



MAGNET MATERIAL FERRITE

SPECIFICATIONS ; -

- **NOMINAL DIAMETER-12"**
- **NOMINAL IMPEDANCE-8Ω**
- **POWER RATING-700W RMS**
- **SENSITIVITY[1W/1M]-97.8dB**
- **FREQUENCY RANGE-63Hz~3KHz**
- **VOICE COIL DIAMETER-3.5"/86MM**



9406324199



sharppaudio123@gmail.com

15P 530



SPECIFICATIONS

- NOMINAL DIAMETER-15"
- NOMINAL IMPEDANCE-8Ω
- POWER RATING-500W RMS
- SENSITIVITY;97.5dB
- FREQUENCY [Hz] 49 3.5kHz
- VOICE COIL DIAMETER-75mm
- 3INCH

MAGNET



9406324199



sharppaudio123@gmail.com



MB15X351

SPECIFICATIONS;

NOMINAL DIAMETER 15"
NOMINAL DIAMETER 8Ω
POWER RATING .700W RMS
SENSITIVITY [1W/1M] 97dB
FREQUENCY RANGE -62~3KHz
VOICE COIL DIAMETER-3.5/86MM
MAGNET MATERIAL FERRITE



9406324199



sharppaudio123@gmail.com



15x600

SPECIFICATIONS;

NOMINAL DIAMETER-15"
NOMINAL IMPEDANCE-8Ω
POWER RATING -600W RMS



SENSITIVITY [1W/1M]-96dB
FREQUENCY RANGE-54~2KHz
VOICE COIL DIAMETER-4"/99MM
MAGNET MATERIAL FERRITE



9406324199



sharppaudio123@gmail.com

15NDL88



SPECIFICATIONS;

- NOMINAL DIAMETER-15"
- NOMINAL IMPEDANCE-8 Ω
- POWER RATING-500W RMS
- SENSITIVITY [1W/1M]-98dB
- FREQUENCY RANGE-40Hz-2KHz
- VOICE COIL DIAMETER-3"/76MM
- MAGNET MATERIAL NEO

 9406324199



sharppaudio123@gmail.com

18TBW100



SPECIFICATIONS;

- NOMINAL DIAMETER-18"
- NOMINAL IMPEDANCE-8Ω
- POWER RATING-1500W RMS
- SENSITIVITY [1W/1M]-96dB
- FREQUENCY RANGE-39~1.5KHz
- VOICE COIL DIAMETER-4"/99.3
- MAGNET MATERIAL FERRITE



9406324199



sharppaudio123@gmail.com

MODEL -; LF18X451



SPECIFICATIONS;

MAGNET MATERIAL FERRITE

- NOMINAL DIAMETER-18"
- NOMINAL IMPEDANCE-8Ω
- POWER RATING -1800W RMS
- SENSITIVITY [1W/1M]-98dB
- FREQUENCY RANGE-32~1KHz
- VOICE COIL MATERIAL-4.5"/114.55

 **9406324199**



sharppaudio123@gmail.com

18TBW 400



SPECIFICATIONS;

DUAL MAGNET

- NOMINAL DIAMETER-18"
- NOMINAL IMPEDANCE-8Ω
- POWER RATING-2000RMS

- SENSITIVITY [1W/1M] 96dB
- FREQUENCY RANGE 37~2KHz
- VOICE COIL DIAMETER-4.5"



9406324199



sharppaudio123@gmail.com

18TBW 600



SPECIFICATIONS:

DUAL MAGNET



- **NOMINAL DIAMETER; 18"**
- **NOMINAL IMPEDANCE 8Ω**
- **POWER RATING-2500W RMS**

- **VOICE COIL DIAMETER-**
- **135MM/5.5**
- **SENSITIVITY- 97dB**
- **FREQUENCY [Hz] 41-600Hz**



9406324199



sharppaudio123@gmailcom

21SW152



SPECIFICATIONS;

- NOMINAL DIAMETER-21"
- NOMINAL IMPEDANCE-8Ω
- POWER RATING -2300W RMS
- SENSITIVITY[1W/1M]-97dB
- FREQUENCY RANGE-32~/1.5KHz
- VOICE COIL DIAMETER - 6"/152MM
- MAGNET MATERIAL NEO



📞 9406324199



sharppaudio123@gmail.com

ST-5S



- NOMINAL IMPEDANCE-8Ω
- PROGRAM POWER-80W
- SENSITIVITY [1M/1W]-107dB



- FREQUENCY RANGE-1.0~20KHz
- VOICE COIL DIAMETER-2.03"
- THROAT SIZE-1.0"

9406324199




sharpaudio123@gmail.com



MODEL; 44AS

- NOMINAL IMPEDANCE; 8Ω
- POWER CAPACITY; 80WATTS RMS
- [PINK NOISE SIGNAL-12db/OCT]
- SENSITIVITY [1W/1M];112dB

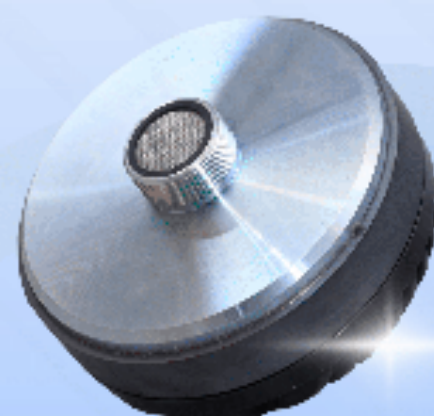

- FREQUENCY RANGE; 1.5KHz~18KHz
- VOICE COIL DIAMETER;1.75IN[44.4MM]
- THROAT DIAMETER; 1.4IN [35MM]/1IN [25MM]

 9406324199

 sharppaudio123@gmail.com

ST-750



- NOMINAL IMPEDANCE-8 Ω
- PROGRAM POWER-120W
- SENSITIVITY-107dB



- FREQUENCY RANGE-1.2~20KHz
- VOICE COIL DIAMETER-3.0
- MAGNET SIZE-170MM

9406324199

sharpaudio123@gmail.com

S 38

NEO;



SPECIFICATIONS;

- NOMINAL IMPEDANCE;- 8Ω
- POWER CAPACITY;-30 WATTS RMS
- SENSITIVITY [1W/1M] ;-107 dB
- FREQUENCY RANGE;- 1.5Hz~20KHz
- VOICE COIL DIAMETER;-1.5IN [38MM]
- MAGNET;- NEODYMIUM N-38H



☎ 9406324199




sharppaudio123@gmail.com

S60



- POWER CAPACITY-60WATTS
- [PINK NOISE SIGNAL]
- FREQUENCY RANGE-1K~20K Hz
- SENSITIVITY (1W/1M)-108dB
- VOICE COIL DIAMETER-44.4MM[1.751N]
- MAGNET MATERIAL NEO

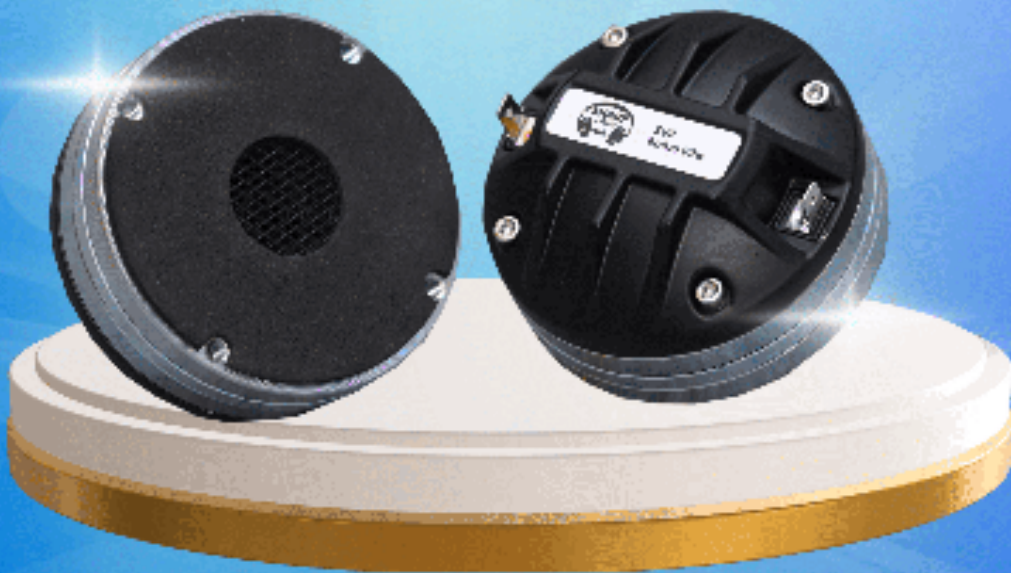

9406324199



sharppaudio123@gmail.com

MODEL;- S 80



- POWER CAPACITY-80 WATTS
- FREQUENCY RANGE-1K-20K Hz
- sensitivity [1w/1m]-108dB
- VOICE COIL DIAMETER 44.4MM|1.75IN|
- MAGNET MATERIAL NEO



9406324199



sharppaudio123@gmail.com

S 75



- POWER CAPACITY-120 WATTS
- FREQUENCY RANGE-1K~18KHz
- sensitivity[1w/1m]-108dB

- VOICE COIL DIAMETER-74.6MM[2.94]
- MAGNET MATERIAL NEO

☎ **9406324199**

🌐 **sharppaudio123@gmail.com**

MODEL :-



ST-140W



9406324199



sharpaudio123@gmail.com



MODEL- S-100



- POWER CAPACITY-150 WATTS
- FREQUENCY RANGE-500~20KHz
- SENSITIVITY [1W/1M]-110dB
- VOICE DIAMETER-154MM[6.06IN]
- MAGNET MATERIAL NEO



 9406324199

 sharpaudio123@gmail.com

ST 4591



1. **NOMINAL IMPEDANCE-8 Ω**
2. **PROGRAM POWER-150W**
3. **SENSITIVITY [1M/1W]-118dB**
4. **FREQUENCY RANGE-200~9KHz**
5. **VOICE COIL DIAMETER-3.5"**
6. **MAGNET SIZE-180MM**



9406324199



sharppaudio123@gmail.com



ST 4592

- NOMINAL IMPEDANCE-2X16Ω
- POWER RATING-[2X200W]
- 8Ω 400 WATT COMPLETE
- SENSITIVITY[1M/1W]-123dB
- FREQUENCY RANGE-200~9KHz
- THROAT SIZE-2"
- MAGNET SIZE-88MM



9406324199



sharpaudio123@gmail.com



MODEL:- ST-150W



9406324199



sharppaudio123@gmail.com



Super beta 58a

SPECIFICATIONS;

1. IMPEDANCE[at 1 khZ];600 30%
2. SENSITIVITY[odb=1v/PAAT1KHZ];70+3dB
3. PATTERN;UNIDIRECTIONAL
4. FREQUENCY RESPONSE;80Hz~15KHz
5. CABLE;6.0X5M



9406324199



sharppaudio123@gmail.com



ST-706

1. FUNCTION CHANGE WAY; DYNAMIC
2. DIRECTIVITY; UNI-DIRECTION
3. FREQUENCY RESPONSE; 50-15KHz
4. OUTPUT IMPEDANCE; 600Q+30%[AT 1KHz]
5. SENSITIVITY ;49.4+3db=[0db=1v/PA AT 1KHz]



 9406324199  sharpaudio123@gmail.com

ST 1002



SPECIFICATIONS;

- sensitivity ; -49+3db[0db=1V/PA AT 1KHz
- OUTER IMPEDANCE; 600Q 30%[AT 1KHz



1. FUNCTION CHANGE WAY; DYNAMIC
2. DIRECTIVITY; UNI-DIRECTION
3. FREQUENCY RESPONSE; 60-15KHz



9406324199



sharpaudio123@gmail.com



ST-710

SPECIFICATIONS;

1. POWER SUPPLY-1X1.5V AA BATTERY
2. FREQUENCY RESPONSE-20Hz -18000Hz
3. IMPEDANCE-1000Q



9406324199



sharppaudio122@gmail.com

Model



ST-168 HH-LL

- FREQUENCY RANGE 750-800MHz
- WORKING DISTANCE 50 METERS
- FREQUENCY RESPONSE"40Hz~16KHz
- AUDIO DISTORTION<0.02%



 9406324199



sharpaudio133@gmail.com



MODEL;- ST-80 HH

- FREQUENCY RANGE;620~681MHz
- FREQUENCY BANDWIDTH;60MHz
- FREQUENCY STABILITY;+0.005%
- WORKING DISTANCE=80MITR



☎ 9406324199



sharpaudio123@gmail.com

MODEL:- ST-80-LL



- FREQUENCY RANGE;620~681MHz
- FREQUENCY BANDWIDTH;60MHz
- FREQUENCY STABILITY;+0.005%
- WORKING DISTANCE=80MITR



☎ 9406324199



sharpaudio123@gmail.com

MODEL:- ST-80-HL



- **FREQUENCY RANGE;620~681MHz**
- **FREQUENCY BANDWIDTH;60MHz**
- **FREQUENCY STABILITY;+0.005%**
- **WORKING DISTANCE=80MITR**

📞 **9406324199**



sharppaudio123@gmail.com

MODEL; -

ST-189 HH



1. FREQUENCY RANGE; 610-690MHz
2. SIGNAL TO NOISE RATIO; 105dB
3. FREQUENCY RESPONSE; 40Hz 18KHz[+2dB]
4. WORKING DISTANCE; 150 200METERS
5. FREQUENCY STABILITY +0.005%



📞 9406324199



sharppaudio123@gmail.com

MODEL;- **ST 195 HH**



1. **FREQUENCY RANGE;** 610~690MHz
2. **SIGNAL TO NOISE RATIO;**105dB
3. **FREQUENCY RESPONSE;**40Hz 18KHz[+2dB]
4. **WORKING DISTANCE;**150 200 METERS
5. **FREQUENCY STABILITY**+0.005%



📞 9406324199

🌐 sharppaudio123@gmail.com



MODEL;- ST-530



- SINGLE IN-EAR MONITOR
- FREQUENCY INTERVAL; 32MHz



9406324199



sharppaudio123@gmail.com

MODEL;-940



- TRANSMIT OUTPUT POWER; 100M/50Q
- EARPHONE LOAD IMPEDANCE >16Q



9406324199



sharppaudio123@gmail.com

MODEL :-



DRIVE RACK 260



- ANALOG INPUTS
- ANALOG OUTPUTS
- A/D PERFORMANCE
- POWER SUPPLY



9406324199



sharppaudio123@gmail.com

MODEL:- DJ-1000



9406324199



sharppaudio123@gmail.com

MODEL :- 234 XL



MODE; $\frac{2}{3}$ WAY STEREO



4 WAY MONO




9406324199



sharppaudio123@gmail.com



model-408 T

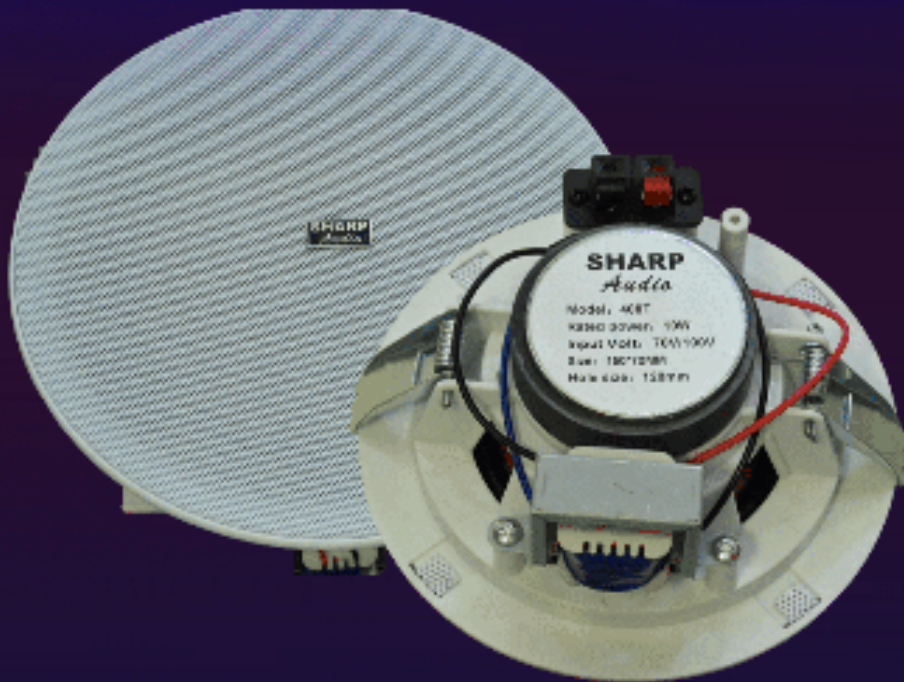

RATED POWER-10W
INPUT VOLT -70V/100V
SIZE-150*70MM
HOLE SIZE-120MM



9406324199




sharpaudio123@gmail.com



MODEL 663 T

RATED POWER-20W
INPUT VOLT-70V/100V
SIZE-190* 85MM
HOLE SIZE -165MM

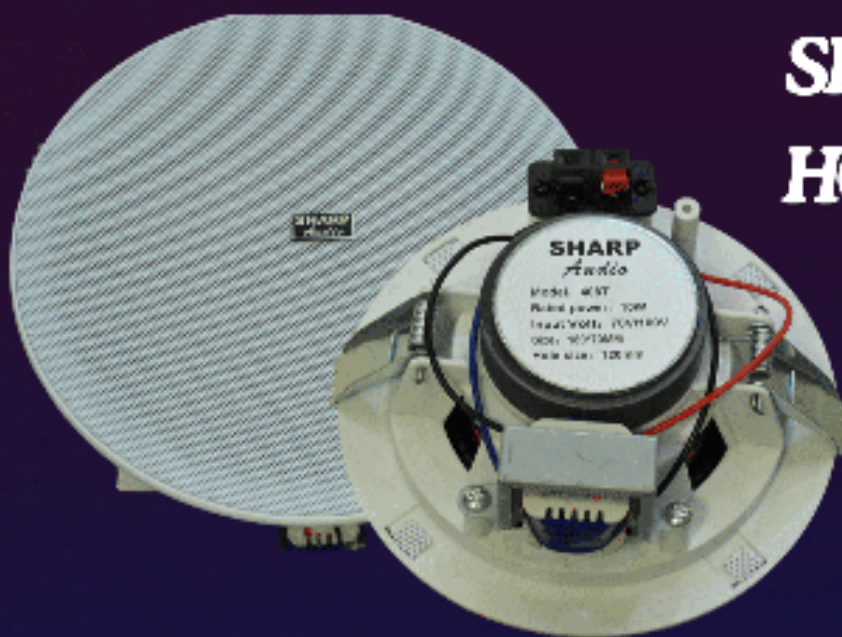


📞 **9406324199** 🌐 **sharpaudio123@gmail.com**



MODEL- 863 T


RATED POWER-863T
INPUT VOLT-70/100W
SIZE-230*90MM
HOLE SIZE-205MM

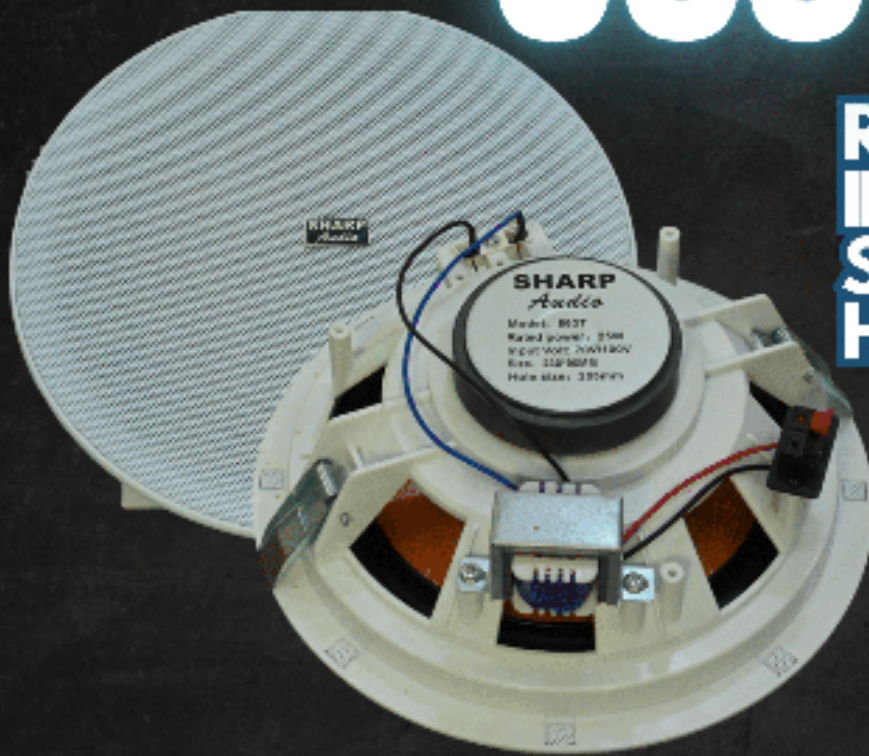

📞 9406324199 🌐 sharppaudio123@gmail.com

MODEL-ST-60T

POWER;20W

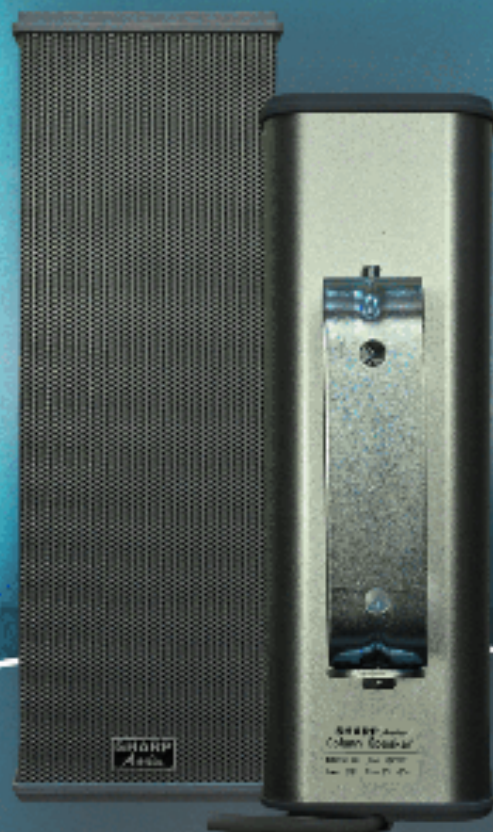

INPUT-70v/100v
SIZE-3'*1+2'*1



9406324199



sharppaudio123@gmail.com

ST-80T

MODEL-ST-80 T



SIZE-3"*2+2"*1



INPUT-70v/100v

☎ 9406324199



sharpaudio123@gmail.com

ST-100T



MODEL-ST-100T 6.5" 2WAY

Sensitivity; 92db[1w/m]

woofer ; 6.5"[165mm]

Tweeter; 1"[25mm]PET Dome

IMPEDANCE ; 800Ω

INPUT ; 70V-100V

RMS POWER ; 60WATTS

FREQUENCY ; 60Hz-20kHz



9406324199



sharppaudio123@gmail.com